


# 539 Web Trax™

## Indoor/Outdoor Drainage Mat

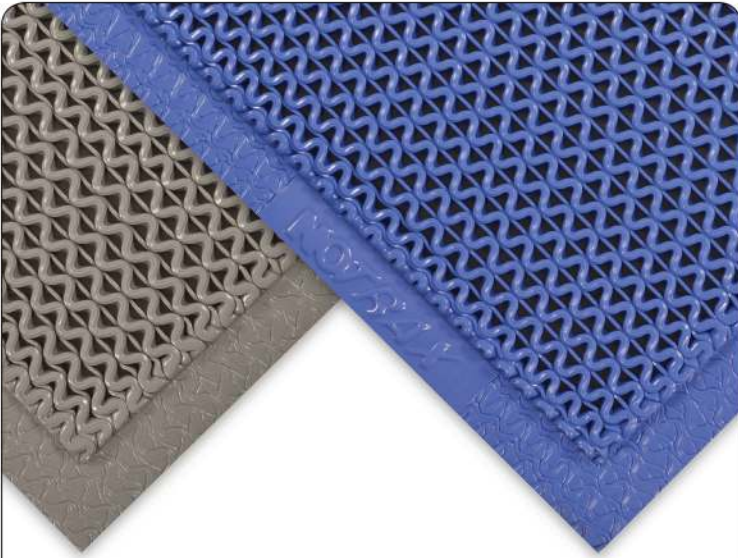

Available Color: Gray, Blue

### Specialty

**W**eb Trax™ is a multi-functional vinyl floor mat that can be used in a variety of wet applications. The wave pattern design creates a slip-resistant walking surface that increases traction on wet and slippery floors. Antibacterial treated PVC material prevents the growth of fungi or bacteria while the open structure design allows for easy draining of liquids. The industrial grade PVC compound also provides greater resistance to caustic chemicals, oils, and greases.

Test	Test Description	*Results
ASTM C-1028-96	Static Coefficient of Friction	Dry: 0.78 Wet: 0.58
-	Compression Deflection	@ 20 lbs/in <sup>2</sup> : 0.040 @ 40 lbs/in <sup>2</sup> : 0.051
ASTM D-1004-94a-03	Tear Strength	23.9 lbs
ASTM D-2240	Durometer (Shore A)	75
ASTM D-3884	Abrasion Resistance	@ 500 cycles: 0.18% @ 1000 cycles: 0.31%
ASTM D-2859/CPSC FF-170	Surface Flammability/Carpets and Rugs	Pass
ASTM E-648	Critical Radiant Flux	Watts per Cm <sup>2</sup> : 0.17
ASTM D-1894-01	Modified Slip Test: Avg. C.O.F. (Coefficient of Friction)	VCT: 0.84 Painted Concrete: 0.50 Vinyl Flooring: 0.98 Epoxy Painted Concrete: 0.46
ASTM D-412	Breaking Load & Elongation	Breaking Load - 66.63 lbs/in <sup>2</sup> Elongation - 145.4%
-	Colorfastness to Light	4 - 5, Slight to Negligible Change
ASTM G21	Fungal Resistance	No Growth After 28 Days

\*All testing of NoTrax® floor matting has been performed by an independent testing laboratory.

2/2015



Custom



Drainage



Outdoor



Anti-Fatigue



Anti-Slip

- Industrial grade extruded PVC - Antibacterial
- Oil and grease resistant/UV resistant
- Free of: DOP, DMF, Silicone, Heavy Metals, Ozone depleting substances
- Thickness: 7/16"
- Stock Size: 3'x5'
- Roll Sizes: 3' x 40', 4' x 40'
- Custom Sizes: 3', 4' widths (up to 40')

